




▼ Convenient For Cart Users

- Cart body is shorter, more convenient to load, allows better vision over cart, and is easier to control
- Cart 'footprint' engineered for stability; resists tipping and does not blow over – even in 40 mph winds
- Lid has hand grip across entire front and around both front corners – very convenient to open
- Injection molding produces uniform wall thickness and tougher bodies with added strength at load bearing points
- Integrally molded details reinforce lift points and stress areas to accommodate heavy loads




Millennium™ Roll-Out Cart

Measurements reflect maximum dimensions.

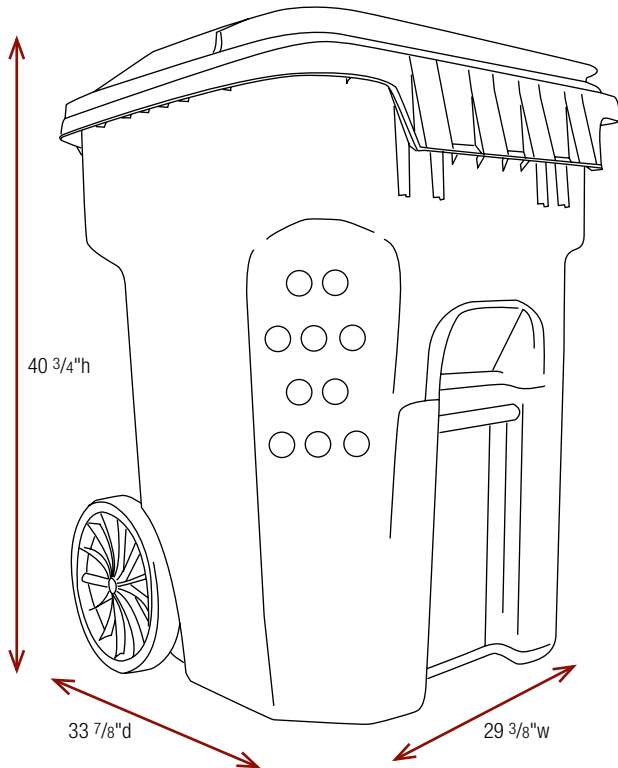

Available Colors

The Millennium™ is available in 8 standard colors. Custom colors available upon request.

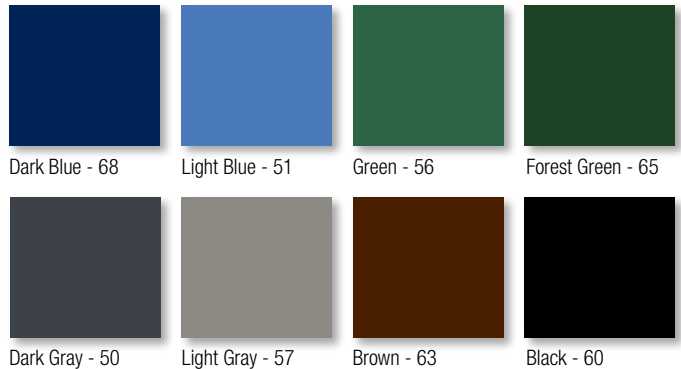

Colors as shown in this document may differ slightly from the actual product.

Customize Your Cart

- Provide instructions to users with in-mold labeling
- Hot stamp sides of cart with company logo or message
- Injection molding of text on lids
- RFID Tag or Barcode available



Features

- Molded recess at bottom allows foot to be placed directly on axle providing leverage for maneuvering heavy loads
- Dual solid plastic ridges molded onto bottom resist abrasion and add years to useful life



Wheel Options

Wheels: 12" wheels are standard on the 95. Popular wheel options including wheels with rubber tread are shown below. Other options are available upon request.



Wheel options may change without notice.

Cart Specifications

| MODEL | HEIGHT | WIDTH | DEPTH | LOAD RATING [°] |
|-----------|---------|---------|---------|--------------------------|
| 95 GAL. M | 40 3/4" | 29 3/8" | 33 7/8" | 340 LBS. |

Cart specifications vary slightly based on product mold. °A.N.S.I. maximum load rating is 3.5 lbs. per gallon.

Shipping Information

| MODEL | ASSEMBLY WEIGHT | STACKING | T/L QTY (53' TRUCK) | LTL STACKING | LTL MAX. QTY |
|-----------|-----------------|----------|---------------------|--------------|--------------|
| 95 GAL. M | 39 - 43 LBS. | 9 HIGH | 504 | 8 HIGH | 144 |

Shipping information varies slightly based on product mold and mold location.

Otto Environmental Systems North America Inc.

12700 General Drive, Charlotte, NC 28273
 Tel. (800) 795-OTTO (6886) • Fax (704) 588-5250
 www.otto-usa.com • info@otto-usa.com



Watch your Waste with Otto™